

Thin  
Client

## F510



Dual display

### PROFILE

Centerm F510 is a cost-effective and compact thin client based on **AMD** LX platform. With high speed, low power consumption and 4K output supported, F510 can meet the demands of various virtual desktop accessing scenarios.

### CERTIFIED BY



# FEATURES

## 01 High reliability

High speed and low power consumption processor with fan-less and no-moving parts design, highly improving reliability.

## 02 Support 4K output & dual display

## 03 Multiple VDI protocol supported


Widely supports Citrix ICA/HDX, VMware PCoIP and Microsoft RDP.

## 04 Environment friendly

Low CO2 emission, low heat emission, noise-free and space saving.


# CONNECTIVITY

Front

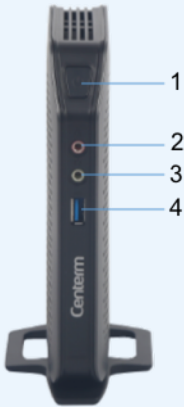


- 1. Power Button
- 2. Mic-in
- 3. Line-out
- 4. USB 3.0 Port

Rear(no Wifi)

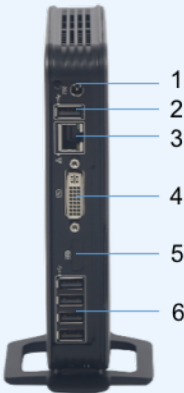

- 1. DC 12V input
- 2. USB 2.0 Port
- 3. RJ-45
- 4. DVI-I Port
- 5. (optional) DP Port
- 6. USB 2.0 Ports

Rear(with Wifi)

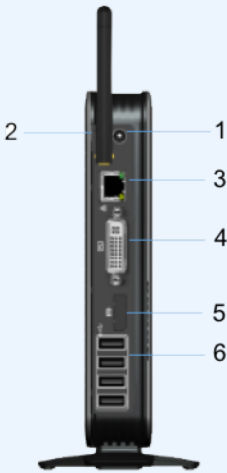

- 1. DC 12V input
- 2. Wifi Antenna
- 3. RJ-45
- 4. DVI-I Port
- 5. (optional) DP Port
- 6. USB 2.0 Ports

## SPECIFICATION (standard)

Processor	AMD GX218GL Dual-Core 1.8GHz
Available Operating System	WES7 / WIN 10 IOT / TOS <sup>1</sup>
VDI/HSD Support	Citrix Receiver / VMware view / Microsoft RDP 8 Compatible
Management	CDMS <sup>2</sup>
RAM (DDR3L)	2GB
Storage (SSD)	8GB
Display	DVI-I x1
Resolution	1920 x1200@60Hz
Color Depth	32 bits
Dual Display	Support
LAN	x 1 (10/100/1000 Base-T Fast Ethernet, RJ-45)
USB 2.0	x 5 rear
USB 3.0	x 1 front
Audio	Line-out x 1 , Mic-in x 1 , (1/8-inch mini jack)
Dimension	131mm x 31.5mm x 167mm(stand not included) 131mm x 76mm x 178mm(stand included)
Net Weight	0.5kg
Adapter	Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/3A DC
Power Consumption	< 15w
Stand	Vertical feet standard
Security	Standard Kensington anti-theft keyhole
Cooling	Fan-less Convection
Operation Temperature	0°C to 40°C
Relative Humidity	30% to 90% non-condensing

## SPECIFICATION (optional)

RAM (DDR3L)	Available at 8GB
Storage (SSD)	Available at 128GB
Network	1 x Mini-PCIE wireless module (one USB port will be used for internal Wifi)
USB 2.0	x 4 rear
DP	3840 x 2160@60Hz
Mounting	VESA mounting kit

1.

TOS: terminal operating system (Linux)

2.

CDMS: Centerm desktop management system

Learn more visit [www.centerm.com](http://www.centerm.com)

